

# PROFLO TO GO

# JET PUMPS



- Includes PF92352 - 1/3 HP cast iron sump pump
- Pump is mounted to base to prevent clogging and switch malfunction
- Pre-plumbed with check valve and discharge pipe
- Reliable vertical float switch
- Pump will lift water up to 25' in height
- 10' power cords



PFTG92352

- Convertible pump preset for shallow well applications
- Choice of 1/2, 3/4 or 1 HP motors
- Rugged cast iron pump body for durability
- Ultra quiet motors
- Solid cast aluminum impellers
- Pre-mounted, fully adjustable pressure switch
- Deep well plug included




Everything you need in one box.

## READY TO GO!

Model	Pump Pre-mounted to Plastic Base	Discharge Pipe	Check Valve Included	Warranty
PFTG92352	Yes	ABS	Yes	3 year
PFTG92352P	Yes	PVC	Yes	3 year
PF92352PB	Yes	None	Yes	3 year

## QUALITY INSIDE AND OUT

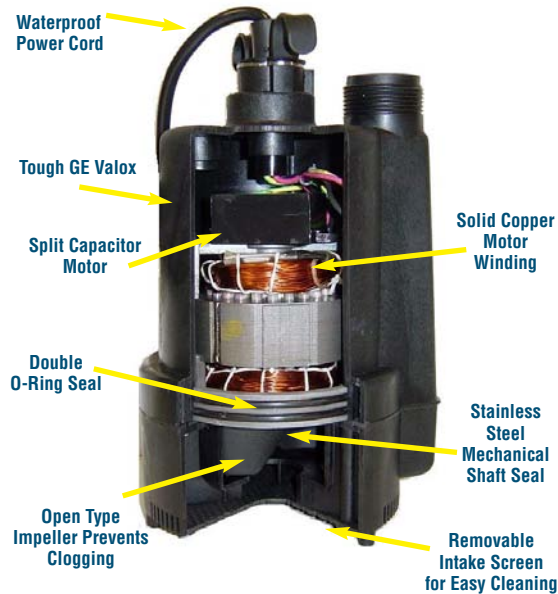

Model	HP	Amps	Suction Size	Discharge Size	Pressure Switch	Max Pressure	Max Flow Rate	Warranty
PF94501	1/2	6.3	1-1/4"	1"	20/40	60 psi	13 GPM	1 Year
PF94751	3/4	8.1	1-1/4"	1"	20/40	62 psi	18 GPM	1 Year
PF94101	1	9.4	1-1/4"	1"	30/50	64 psi	22 GPM	1 Year



Distributed exclusively by  
Wolseley North American Division  
Ferguson, Stock Building Supply and  
Wolseley Canada

## PUMP SELECTION GUIDE

Sump  
Utility  
Sewage/Effluent  
Jet



# SUMP PUMPS

## Submersible Sump Pumps

- Split capacitor, continuous duty motors
- Rugged cast iron or tough thermoplastic construction
- Pumps will lift water up to 25' in height
- 10' power cords

## Pedestal Sump Pump

- Split capacitor, continuous duty motor
- Tough thermoplastic construction
- Durable metal switch arm
- Pump will lift water up to 20' in height
- 10' power cord

Model	HP	Amps	Construction	Discharge Size	Switch Type	Solids Handling	Max Flow Rate	Warranty
PF92260	1/4	3.8	Thermoplastic	1-1/4"	Vertical	1/8"	30 GPM	1 Year
PF92342	1/3	3.8	Thermoplastic	1-1/4"	Vertical	1/8"	40 GPM	1 Year
PF92341	3/10	4.1	Cast Iron	1-1/2"	Vertical	3/8"	40 GPM	3 Years
PF92352	1/3	7.6	Cast Iron	1-1/2"	Vertical	1/2"	60 GPM	3 Years
PF92511	1/2	7.6	Cast Iron	1-1/2"	Vertical	1/2"	70 GPM	3 Years
PF92333	1/3	2.76	Thermoplastic	1-1/4"	Vertical	3/16"	50 GPM	1 Year



# UTILITY PUMPS

- Split capacitor, continuous duty motors
- Tough thermoplastic construction
- 1-1/4" discharge
- 3/4" garden hose adapter included
- Maximum head of 25'
- 10' or 25' power cords
- Handles 1/8" solids
- One year warranty

Model	HP	Amps	Construction	Discharge Size	Cord Length	Solids Handling	Warranty
PF91025	1/5	3.6	Thermoplastic	1 1/4" & 3/4"	10'	1/8"	1 Year
PF91335	1/3	4.1	Thermoplastic	1 1/4" & 3/4"	25'	1/8"	1 Year



**We have a pump to meet your needs!**

# SEWAGE/EFFLUENT PUMPS

## Sewage Pumps

- Split capacitor, continuous duty motors
- Rugged cast iron construction
- Trouble free vortex impeller
- Choose from tethered or vertical float switches
- Handles full 2" spherical solids
- 10' power cords

## Effluent/Sump Pumps

- Split capacitor, continuous duty motor
- Rugged cast iron construction
- Trouble free vortex impeller
- Tethered float switch
- Will easily handle 5/8" solids
- 10' power cord

Model	HP	Amps	Construction	Discharge Size	Switch Type	Solids Handling	Max Flow Rate	Warranty
PF93501	1/2	7.6	Cast Iron	2"	Tethered	2"	80 GPM	1 Year
PF93511	1/2	7.6	Cast Iron	2"	Vertical	2"	80 GPM	1 Year
PF92305	1/3	7.6	Cast Iron	1-1/2"	Tethered	5/8"	60 GPM	1 Year

